Whirlpool® SCS3617R (36")

KEY FEATURES

- Formed Styling, Graphics and Knobs
- Porcelain-on-Steel Surface on Color Models (Q/B); Stainless Steel Surface on Stainless(S)
- One 5,000, One 9,100 and Two 12,500 BTU Power™ Burners
- Sealed Gas Burners
- Electronic Ignition
- Porcelain-Coated Cast-Iron Grates

COLORS

White(Q) Black(B) Stainless Steel(S*

* Stainless model features stainless steel cooktop.

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Gas Cooktop Features & Specifications

Model No.	Whirlpool Gold®
36"	**SCS3617R**
Cooktop	
Porcelain-on-Steel Cooktop	Yes**
Burner Type	Sealed
Ignition	Electronic
Burner BTU/hr. Rating: Right Front	5,000
Left Front	12,500
Right Rear	12,500
Left Rear	9,100
Porcelain-Coated Cast-Iron Grates	Yes
Non-Turn Grates	Yes
Lift-Off Control Knobs	Yes
General Information	
LP Conversion Kit Included	Yes
Approval Over Single Oven	Yes
Approval with Downdraft	Yes
Approx. Shipping Weight (lbs.)	44

** Stainless model features stainless steel cooktop.

Product Dimensions

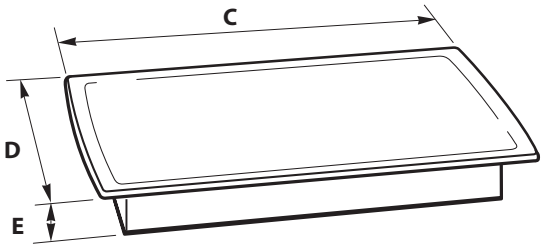

Cooktop Model	Cutout Width A	Cutout Depth B	Overall Width C	Depth D	Burner Box Height E
SCS3617R	35 1/4	19	37 9/16	21 1/8	2 7/8

All dimensions are shown in inches. Note: Dimensions **A** and **B** below.

Cut-Out Dimensions

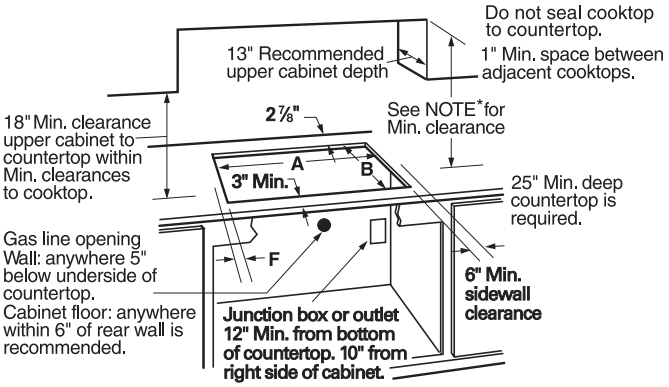
Do not seal cooktop to countertop.
13" Recommended upper cabinet depth
1" Min. space between adjacent cooktops.
2 7/8"
See NOTE* for Min. clearance
18" Min. clearance upper cabinet to countertop within Min. clearances to cooktop.
A
B
3" Min.
25" Min. deep countertop is required.
Gas line opening Wall: anywhere 5" below underside of countertop.
Cabinet floor: anywhere within 6" of rear wall is recommended.
F
6" Min. sidewall clearance
Junction box or outlet 12" Min. from bottom of countertop. 10" from right side of cabinet.

36" models require a 36" minimum base cabinet. After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the burner box. To avoid this modification, use a base cabinet with side walls wider than the cutout. If cabinet has a drawer, a 4" depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator. All dimensions are shown in inches.

* Note: 24" (61 cm) min. clearance if bottom of wood or metal cabinet is protected by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper. 30" (76.2 cm) min. clearance between top of cooking platform and bottom of unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.